

User Manual

Contents

ALDI GUARANTEES THAT OUR EXCLUSIVE BRAND PRODUCTS ARE DEVELOPED TO OUR STRINGENT QUALITY SPECIFICATIONS. IF YOU ARE NOT ENTIRELY SATISFIED WITH THIS PRODUCT, PLEASE RETURN IT TO THE NEAREST ALDI STORE WITHIN 60 DAYS FROM THE DATE OF PURCHASE, FOR A FULL REFUND OR REPLACEMENT, OR TAKE ADVANTAGE OF OUR AFTER SALES SUPPORT BY CALLING THE SUPPLIER'S CUSTOMER SERVICE HOTLINE.



Made in China
FERREX® is a registered trademark of ALDI Stores
 DISTRIBUTED BY:
 ALDI STORES
 1 SARGENTS ROAD
 MINCHINBURY NSW 2770
www.aldi.com.au

AFTER SALES SUPPORT 833260

AU 1300 855 831

support@scheppach.com.au

MODELL: F-WDV30P 05/2024







FERREX®

WET AND DRY VACUUM CLEANER F-WDV30P




Translation of original instruction manual




Table of contents:	Page:
1. Introduction	9
2. Device description (Fig. 1 - 3)	10
3. Scope of delivery	10
4. Proper use	11
5. Safety instructions	12
6. Technical data	13
7. Unpacking	14
8. Assembly / Before commissioning	14
9. Start up	16
10. Cleaning	17
11. Storage and transport	17
12. Maintenance	18
13. Electrical connection	18
14. Disposal and recycling	20
15. Troubleshooting	20

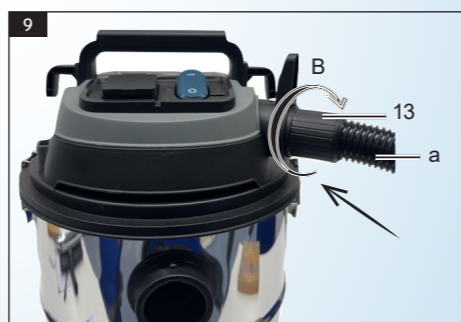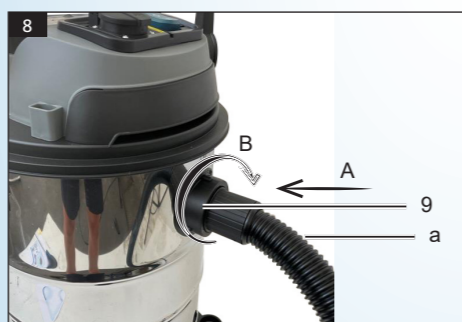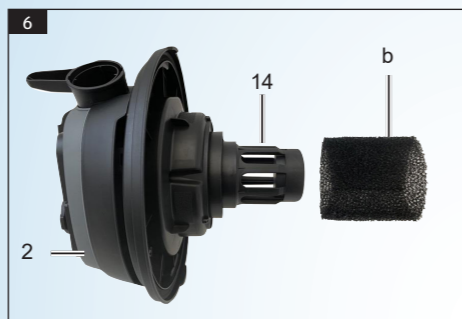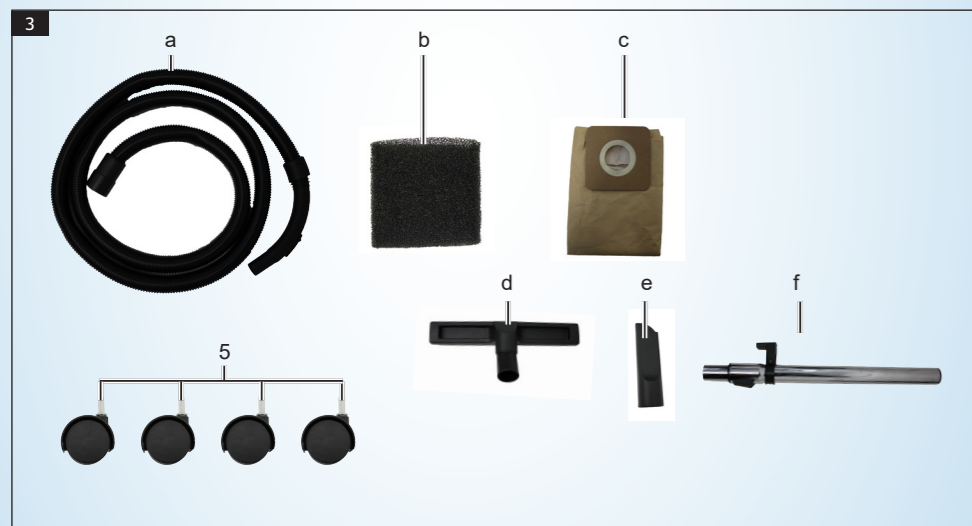



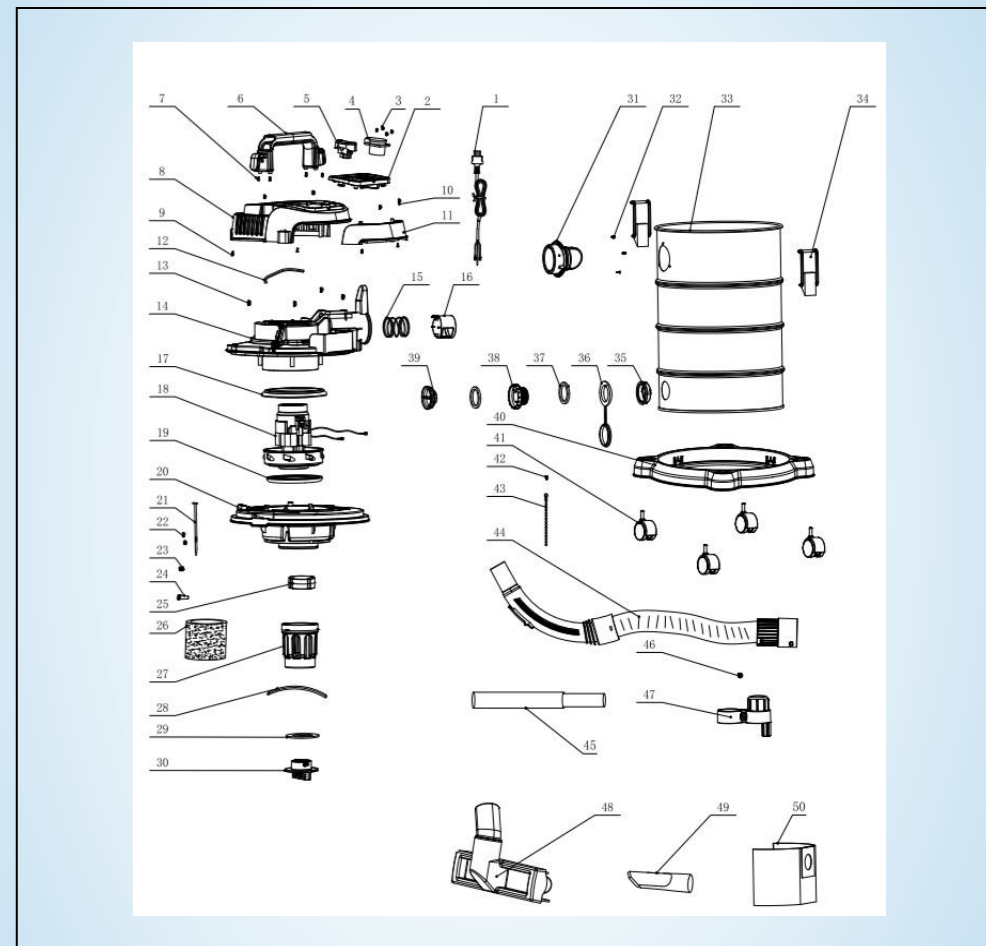

Scope of delivery

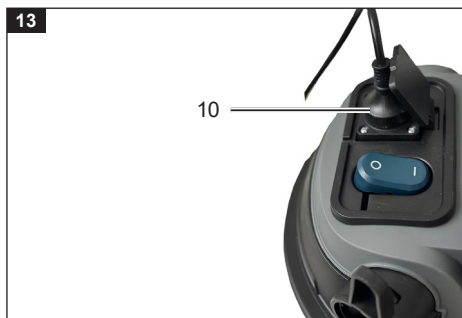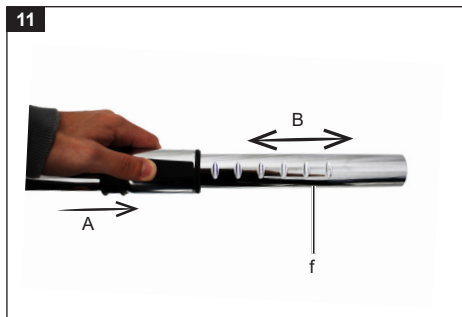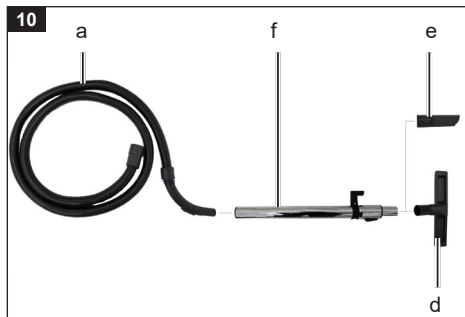- 1 x Wet and dry vacuum cleaner
- 1 x Suction hose
- 1 x Foam filter
- 1 x Paper filter bag
- 1 x Floor nozzle
- 1 x Crevice nozzle
- 1 x Extension tube
- 1 x Operating manual
- 1 x Warranty card





Explanation of the symbols on the device

	<p>Before commissioning, read and observe the operating manual and safety instructions!</p>
	<p>Max. device socket power.</p>
<p>Protection class of the device socket: IP54</p>	<p>Protection against dust and splashing water.</p>
<p>Protection class of the wet and dry vacuum cleaner: IP24</p>	<p>Protection against solid foreign bodies and splashing water.</p>
	<p>The RCM Mark (Regulatory Compliance Mark) indicates that the product complies with the relevant guidelines of the ACMA as well as corresponding government requirements for the safety of electrical devices.</p>
	<p>3 Year warranty.</p>

1. Introduction

Congratulations on your purchase of this FERREX® product.

All FERREX® products, are manufactured to the highest standards of performance and safety and are secured by our comprehensive 3-year warranty as part of our customer service.

We hope you will enjoy your purchase for many years to come.

Note:

In accordance with the applicable product liability laws, the manufacturer of this device assumes no liability for damage to the device or caused by the device arising from:

- Improper handling
- Failure to comply with the operating instructions,
- Repairs carried out by third parties, unauthorised specialists.
- Installing and replacing non-original spare parts,
- Application other than specified.
- Failures of the electrical system in the event of the electrical regulations and VDE provisions 0100, DIN 57113 / VDE0113 not being observed.

Recommendations:

Read through the complete text in the operating manual before installing and commissioning the device.

This operating manual should help you to familiarise yourself with your device and to use it for its intended purpose.

The operating manual includes important instructions for safe, proper and economic operation of the device, for avoiding danger, for minimising repair costs and downtimes, and for increasing the reliability and extending the service life of the device.

In addition to the safety instructions in this operating manual, you must also observe the regulations applicable to the operation of the device in your country.

Keep the operating manual at the device, in a plastic sleeve, protected from dirt and moisture. They must be read and carefully observed by all operating personnel before starting the work. The device may only be used by personnel who have been trained to use it and who have been instructed with respect to the associated hazards. The required minimum age must be observed.

In addition to the safety instructions in this operating manual and the separate regulations of your country, the generally recognised technical rules relating to the operation of such machines must also be observed.

We accept no liability for accidents or damage that occur due to a failure to observe this manual and the safety instructions.

2. Device description (Fig. 1 - 3)

1. Handle
 2. Machine head
 3. Mains cable
 4. Locking hooks
 5. Castors
 6. Castor mounting plate
 7. Water drain plug
 8. Stainless steel container
 9. Suction connection
 10. Socket with auto switch-on device
 11. On/off switch
 12. Cable holder
 13. Connection for blower function
 14. Filter basket with safety float valve
-
- a) Suction hose
 - b) Foam filter
 - c) Paper filter bag
 - d) Floor nozzle
 - e) Crevice nozzle
 - f) Extension tube

3. Scope of delivery

- 1 x Wet and dry vacuum cleaner
- 1 x Suction hose
- 1 x Foam filter
- 1 x Paper filter bag
- 1 x Floor nozzle
- 1 x Crevice nozzle
- 1 x Extension tube
- 1 x Operating manual
- 1 x Warranty card

4. Proper use

The wet and dry vacuum cleaner is suitable for wet and dry vacuuming using the appropriate filter. The device is not intended for vacuuming flammable, explosive or harmful substances.

The machine may only be used in the intended manner. Any use beyond this is improper. The user/operator, not the manufacturer, is responsible for damages or injuries of any type resulting from this.

Please note that our equipment was not designed with the intention of use for commercial or industrial purposes. We assume no guarantee if the device is used in commercial or industrial applications, or for equivalent work.

5. Safety instructions

General safety instructions

⚠ DANGER!

- Connect the device to alternating current only. The voltage must match the type plate on the device.
- Never touch the mains plug and socket with wet hands.
- Do not pull the mains plug out of the socket by pulling on the connection cable.
- If the supply cord is damaged, it must be replaced by the manufacturer, its service agent or similarly qualified persons in order to avoid a hazard.
- To avoid electrical accidents, we recommend using sockets with an upstream residual-current circuit breaker (max. 30 mA rated tripping current).
- Pull out the mains plug before carrying out any cleaning and maintenance work!
- All repair work, also to any electrical components, must be carried out by an authorised customer service centre.

⚠ Attention!

- This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.
- Children may not play with the device.
- Children should be supervised in order to ensure that they do not play with the device.
- Cleaning and user maintenance must not be carried out by children unsupervised.
- Keep packaging material away from children, there is a risk of suffocation!
- The plug must be removed from the socket-outlet before cleaning or maintaining the appliance.
- Risk of fire. Do not vacuum any burning or glowing particles.
- Do not operate the device in explosive environments.

- If foam forms or liquid escapes, switch off the device immediately or pull out the mains plug!
- Do not use abrasive cleaners, glass or all-purpose cleaners! Do not immerse the device in water.

Certain substances can form explosive vapours or mixtures when they are swirled with the suction air! Never vacuum the following substances:

- Explosive or flammable gases, liquids and dusts (reactive dusts)
- Reactive metal dusts (such as aluminum, magnesium, zinc) combined with strongly alkaline and acidic cleaning agents
- Undiluted strong acids and alkalis
- Organic solvents (such as gasoline, paint thinner, acetone, heating oil).

In addition, these substances can corrode the materials used on the device.

⚠ WARNING!

This power tool generates an electromagnetic field during operation. This field can impair active or passive medical implants under certain circumstances. In order to prevent the risk of serious or deadly injuries, we recommend that persons with medical implants consult with their physician and the manufacturer of the medical implant prior to operating the power tool.

6. Technical data

Model:	F-WDV30P
Mains voltage:	220 - 240V~ 50/60 Hz
Power:	1200 W
Max. device socket power:	1000 W
Total power:	2200 W
Water tank capacity:	30L
Suction performance:	16 kPa
Protection category:	IP24
Protection class:	I

7. Unpacking

Open the packaging and carefully remove the device.

Remove the packaging material, as well as the packaging and transport safety devices (if present).

Check whether the scope of delivery is complete.

Check the device and accessory parts for transport damage. In the event of complaints the carrier must be informed immediately. Later claims will not be recognised.

If possible, keep the packaging until the expiry of the warranty period.

Familiarise yourself with the device by means of the operating manual before using for the first time.

With accessories as well as wearing parts and replacement parts use only original parts. Spare parts can be obtained from your specialist dealer.

When ordering please provide our article number as well as type and year of manufacture for your equipment.

⚠ ATTENTION!

The device and the packaging material are not children's toys! Do not let children play with plastic bags, films or small parts! There is a danger of choking or suffocating!

8. Assembly / Before commissioning

⚠ ATTENTION!

Prior to use, ensure that the device has been correctly and fully assembled.

Unpacking (Fig. 1, 2, 5)

- Release the locking hooks (4) and remove the machine head (2). The accessories are located inside the stainless steel container (8).

Installing the castors (5) (Fig. 4)

- Set the stainless steel container (8) on the upside. (The machine head (2) must be removed beforehand).
- Press the four castors (5) into the holes in the castor mounting plate (6).

Installing the machine head (2) (Fig. 5)

- Place the machine head (2) on the stainless steel container (8). Secure the machine

head (2) with the locking hooks (4). When fitting the machine head (2), ensure that the locking hooks (4) latch into place correctly.

⚠ ATTENTION!

Never use the device without filter! Always ensure that the filters are correctly fitted.

Fitting the foam filter (b) (Fig. 6)

- Fitting the foam filter (b): For wet vacuuming, slide the foam filter (b) provided over the filter basket with safety float valve (14).

Installing the paper filter bag (c) (Fig. 7)

It is recommended to use an additional paper filter bag (c) when vacuuming fine, dry dirt.

- Slide the paper filter bag (c) over the suction opening in the stainless steel container (8). The paper filter bag (c) is only suitable for dry vacuuming. The paper filter bag (c) makes it easier to dispose of the dust collected.

Fitting the suction hose (a) (Fig. 8, 9)

Connect the suction hose (a) to the corresponding port, depending on the desired use, on the wet and dry vacuum.

Wet and dry vacuuming (Fig. 8)

Connect the suction hose (a) to the suction connection (9). To do so, slide the end of the suction hose (a) with the two nipples into the suction connection (9) (A). Insert the two nipples into the recesses. Once the suction hose (a) is fully inserted, turn it clockwise (B).

Blowing (Fig. 9)

Connect the suction hose (a) to the connection for blower function (13). Slide the end of the suction hose (a) with the two nipples into the connection for blower function (13). Insert the two nipples into the recesses. Once the suction hose (a) is fully inserted, turn it clockwise (B).

Fit the extension tube (f), suction hose (a) and nozzles (d/e) (Fig. 10, 11)

- Connect the extension tube (f) to the curved end of the suction hose (a).
- Fit the floor nozzle (d) or crevice nozzle (e) to the other end of the extension tube (f).
- Push the slide piece forwards (A) to change the length of the extension tube (f).

- Pull the tube to the desired length (B). Ensure that the slide lock latches into place.

9. Start up

⚠ ATTENTION!

Always make sure the device is fully assembled before commissioning!

⚠ WARNING!

Switch the device off if liquid or foam emerges with the exhaust air during wet vacuuming.

Switching on/off/automatic (Fig. 12, 13)

The on/off switch (11) has two settings:

1. Switch setting 0: Off
 2. Switch setting I: On
 - Press the on/off switch to the “I” position to switch on.
 - Push the ON/OFF switch (11) into position “0” to switch the device off.
- Plug your electrical tool's cable into the automatic socket (10) (Fig. 13).
 - Connect the suction hose (a) to the suction connection on your electrical tool. Check that the connection is secure and airtight. The suction hose (a) cannot be connected to the connection for blower function (13).
 - Set the switch on the vacuum system to position “I”.

Dry vacuuming (fig. 7)

Use the paper filter bag (c) for dry vacuuming. Ensure that the filter bag (c) is correctly fitted.

Wet vacuuming (fig. 6)

Use the foam filter (b) for wet vacuuming. Ensure that the foam filter (b) is correctly fitted.

If the stainless steel container (8) is full, the safety float valve (14) closes the suction port and suction operation is interrupted.

⚠ Attention!

The device is not suitable for vacuuming flammable liquids. For wet vacuuming, use the only the foam filter (b) provided.

Water drain plug (Fig. 14)

The stainless steel container (8) is equipped with a water drain plug (7) in order to make it easier to drain. Open the water drain plug (7) by turning it counter-clockwise and drain out the liquid.

10. Cleaning

⚠ WARNING!

Pull out the mains plug before carrying out any setting, servicing or repair work!

It is recommended to clean the device after each use. Do not spray the device with water or clean it under running water. This can result in electric shocks and can damage the device.

Empty the stainless steel container (8) after each use: After opening the water drain plug (7), the liquid collected can be drained out. Residual liquid remains in the stainless steel container (8). To remove residual liquid, take off the machine head (2) by releasing the locking hooks (4) from the stainless steel container (8). Pour out the liquid residue. Clean the container with a damp cloth.

- Always keep the device clean. Do not use cleaning agents or solvents.
- Keep the ventilation slots clean and free of dirt and dust.
- Clean the device only with a soft brush or a damp cloth.
- Clean the foam filter (b) with a little soap and running water and then leave it to air dry.

11. Storage and transport

Store the device and its accessories in a dark, dry and frost-free place that is inaccessible to children. The optimum storage temperature is between 5 and 30°C.

Store the power tool in its original packaging.

Cover the power tool to protect it from dust or moisture.

Store the operating manual with the power tool.

- Wrap the mains cable (3) around the cable holders (12) (two options). (Fig. 15)
- There are four recesses on the top side of the castor mounting plate (6) for storage of the floor nozzle (d), the crevice nozzle (e) and the extension tube (f) (Fig. 17).
- The remaining accessories can be stored in the stainless steel container (8).

12. Maintenance

Attention!

Disconnect the mains plug before carrying out any maintenance work.

Connections and repairs

Connections and repair work on the electrical equipment may only be carried out by electricians.

Please provide the following information in the event of any enquiries:

- Type of current for the motor
- Machine data - type plate
- Engine data - type plate

Service information

With this product, it is necessary to note that the following parts are subject to natural or usage-related wear, or that the following parts are required as consumables.

Wearing parts*: Foam filter, paper filter bag, HEPA filter

* may not be included in the scope of delivery!

Spare parts and accessories can be obtained from our Service Centre. Contact our service partners (see warranty card).

13. Electrical connection

The electrical motor installed is connected and ready for operation. The connection complies with the applicable VDE and DIN provisions. The customer's mains connection as well as the extension cable used must also comply with these regulations.

Important information

In the event of overloading, the motor will switch itself off. After a cool-down period (time varies) the motor can be switched back on again.

Damaged electrical connection cable

The insulation on electrical connection cables is often damaged.

This may have the following causes:

- Pressure points, where connection cables are passed through windows or doors.
- Kinks where the connection cable has been improperly fastened or routed.
- Places where the connection cables have been cut due to being driven over.
- Insulation damage due to being ripped out of the wall outlet.
- Cracks due to the insulation ageing.

Such damaged electrical connection cables must not be used and are life-threatening due to the insulation damage.

Check the electrical connection cables for damage regularly. Ensure that the connection cables are disconnected from electrical power when checking for damage.

Electrical connection cables must comply with the applicable VDE and DIN provisions.

Only use connection cables with designation H05VV-F.

The printing of the type designation on the connection cable is mandatory.

AC motor

- The mains voltage must be 220 - 240 V~.
- Extension cables up to 25 m long must have a cross-section of 1.5 mm².

Connections and repair work on the electrical equipment may only be carried out by electricians.

Connection type Y

If it is necessary to replace the mains connection cable, this must be done by the manufacturer or their representative to avoid safety hazards.

Please provide the following information in the event of any enquiries:

- Type of current for the motor
- Machine data - type plate

14. Disposal and recycling

The equipment is supplied in packaging to prevent it from being damaged in transit. The raw materials in this packaging can be reused or recycled. The equipment and its accessories are made of various types of material, such as metal and plastic. Defective components must be disposed of as special waste. Ask your dealer or your local council.

15. Troubleshooting

The following table shows fault symptoms and describes remedial measures in the event of your machine failing to work properly. If you cannot localise and rectify the problem with this, please contact your service workshop.

Fault	Possible cause	Remedy
Engine does not run.	Check whether the plug is plugged in.	Plug the mains plug back in to the socket.
	Check whether there is power to the socket.	Call an electrician.
	Check whether the vacuum cleaner on/off switch is switched on.	Switch the on/off switch on.
Reduced vacuuming power.	Floor nozzle or crevice nozzle is blocked.	Switch off the vacuum cleaner. Remove blockage from the nozzle used.
	Paper filter bag is full of dust.	Change the Paper filter bag.



ALDI

FERREX®

Wet and Dry Vacuum Cleaner

Warranty Details

REGISTER YOUR PURCHASE AT www.aldi.com.au/en/about-aldi/product-registration/ TO KEEP UP-TO-DATE WITH IMPORTANT PRODUCT INFORMATION

The product is guaranteed to be free from defects in workmanship and parts for a period of 36 months from the date of purchase. Defects that occur within this warranty period, under normal use and care, will be repaired, replaced or refunded at our discretion. The benefits conferred by this warranty are in addition to all rights and remedies in respect of the product that the consumer has under the Competition and Consumer Act 2010 and similar state and territory laws.

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

AFTER SALES SUPPORT

1300 855 831

support@scheppach.com.au

AUS Hotline Costs: Local rate for landline calls*
*Charges may vary dependent upon network operator or mobile network provider.

MODEL: F-WDV30P PRODUCT CODE: 833260 05/2024





Repair and Refurbished Goods or Parts Notice

Unfortunately, from time to time, faulty products are manufactured which need to be returned to the Supplier for repair.

Please be aware that if your product is capable of retaining user-generated data (such as files stored on a computer hard drive, telephone numbers stored on a mobile telephone, songs stored on a portable media player, games saved on a games console or files stored on a USB memory stick) during the process of repair, some or all of your stored data may be lost.

We recommend you save this data elsewhere prior to sending the product for repair.

You should also be aware that rather than repairing goods, we may replace them with refurbished goods of the same type or use refurbished parts in the repair process.

Please be assured though, refurbished parts or replacements are only used where they meet ALDI's stringent quality specifications.

If at any time you feel your repair is being handled unsatisfactorily, you may escalate your complaint. Please telephone us on SUPPLIER TELEPHONE or write to us at:

Rossmac Pty. Ltd.

Unit 6, 4 Ovata Drive, Tullamarine, Victoria, 3043

Telephone: 1300 855 831 (Monday - Friday 8:00am-6:00pm)

Email: support@schepach.com.au

AFTER SALES SUPPORT

  1300 855 831

AUS Hotline Costs: Local rate for landline calls*
*Charges may vary dependent upon network operator or mobile network provider.

 support@schepach.com.au

MODEL: F-WDV30P PRODUCT CODE: 833260 05/2024

