


Translation of the original operating
instructions



FERREX[®]







WET & DRY VACUUM CLEANER F-WDV20

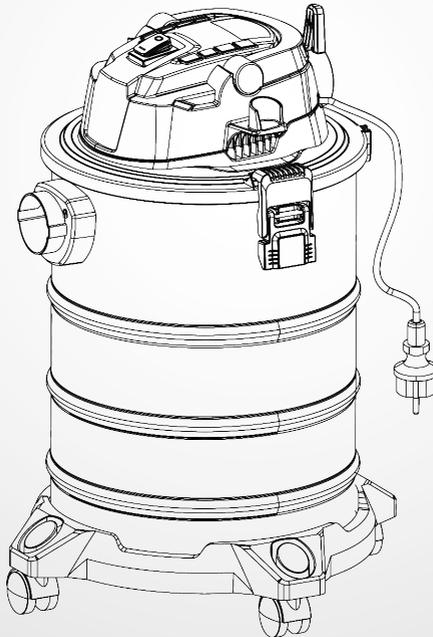

Translation of the original operating instructions



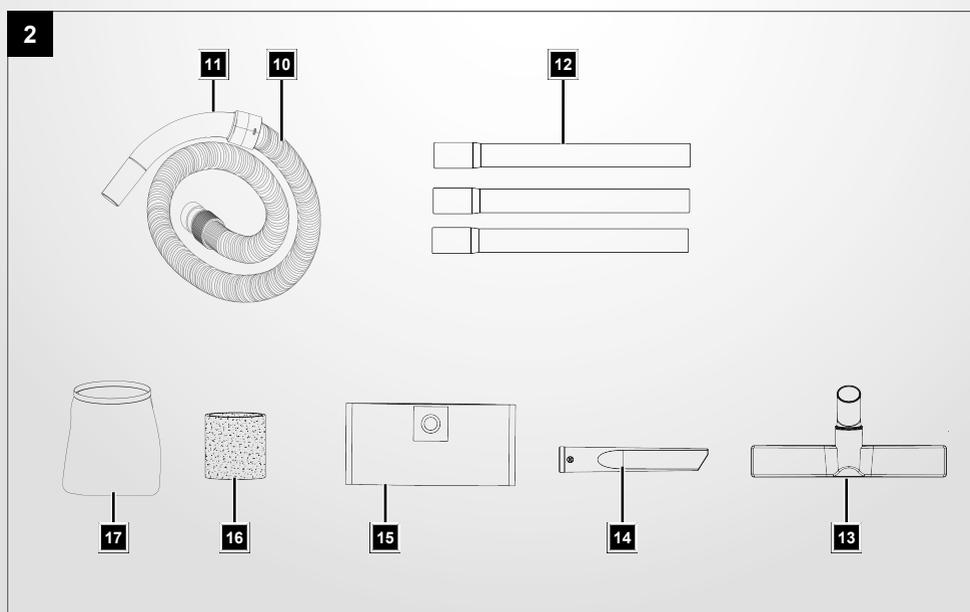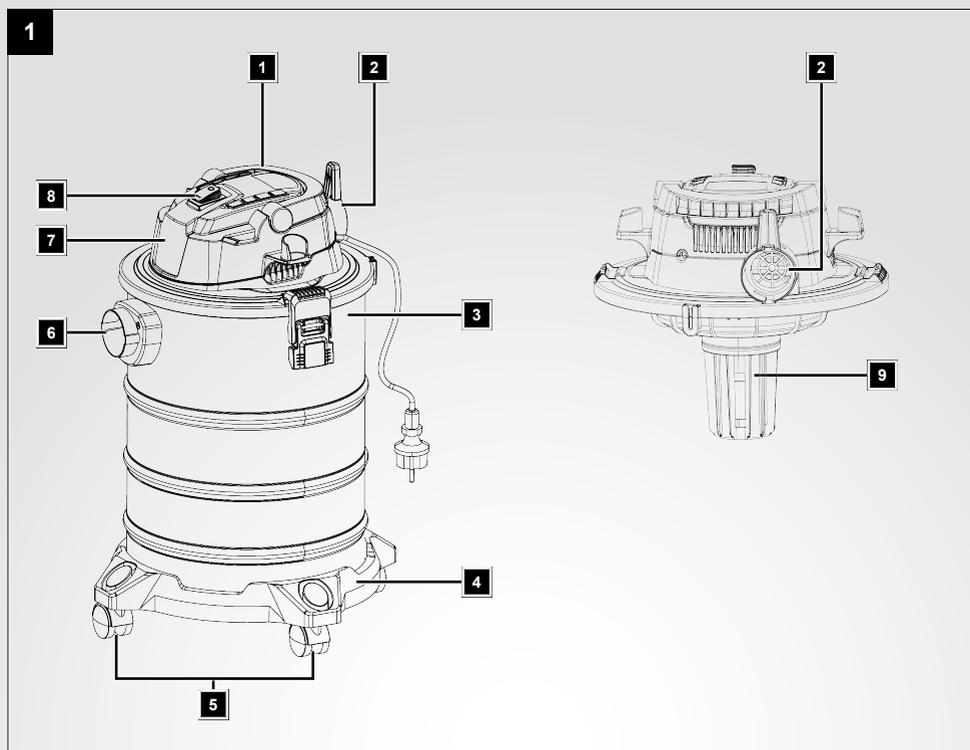

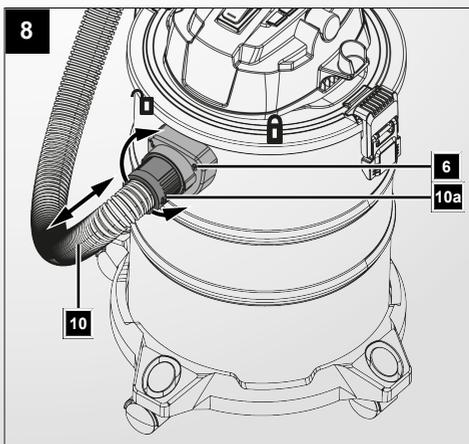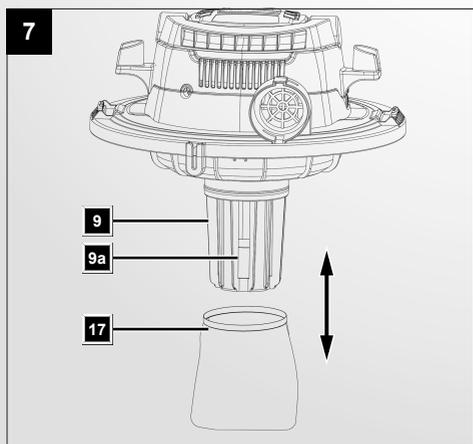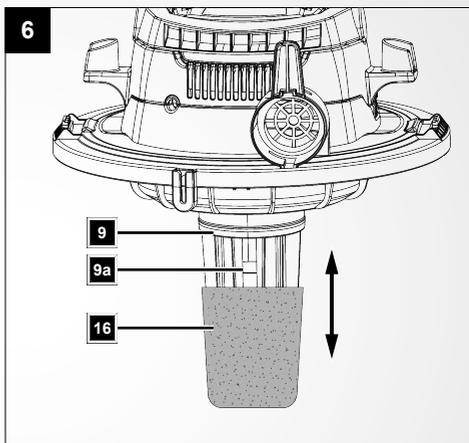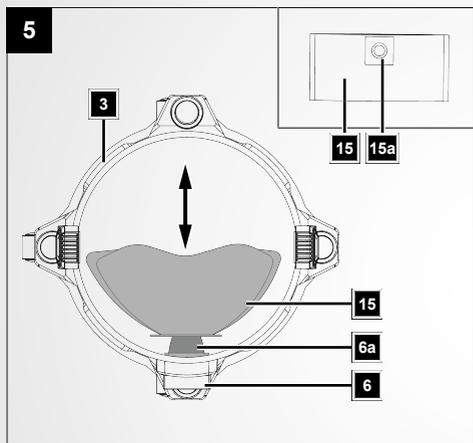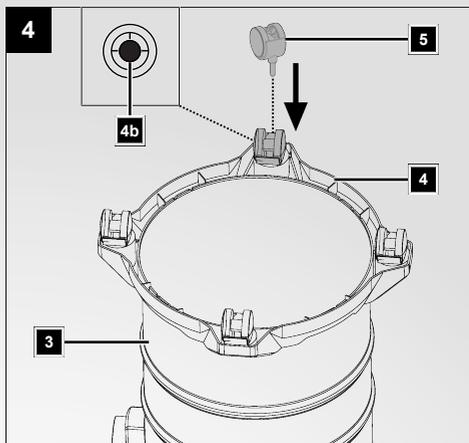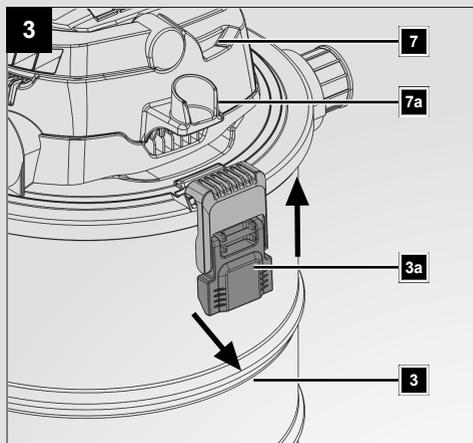

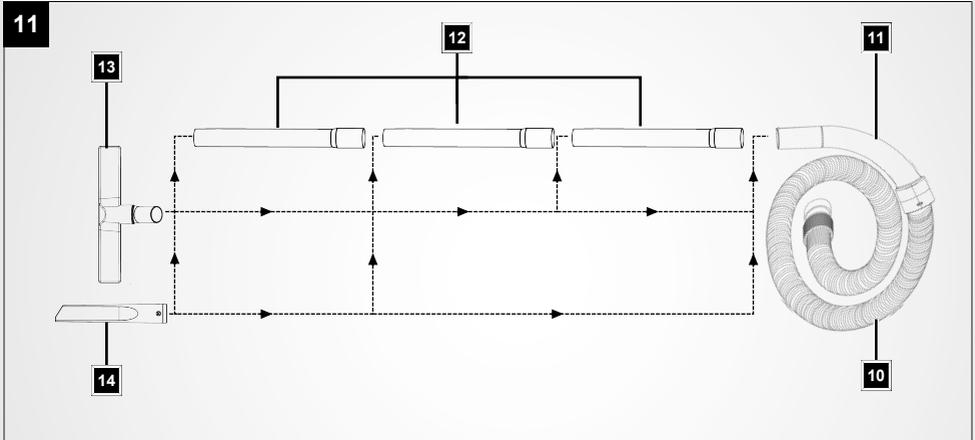
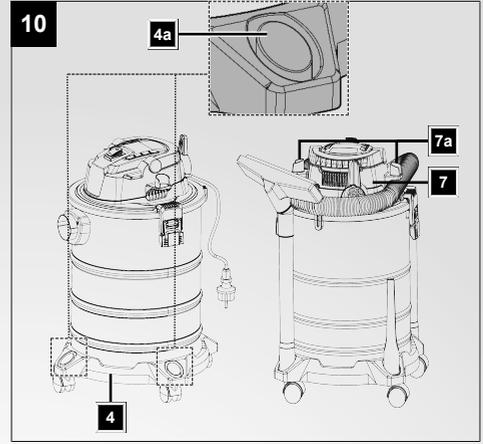
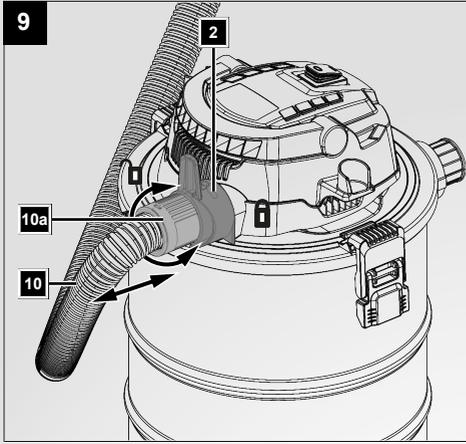


Table of contents

1. Introduction	6
2. Product description (Fig. 1-11).....	6
3. Scope of delivery (Fig. 2).....	7
4. Proper use	7
5. Safety instructions.....	9
6. Technical data	11
7. Unpacking	12
8. Assembly	12
9. Operation.....	15
10. Working instructions	16
11. Electrical connection	19
12. Cleaning and maintenance	20
13. Storage and transport.....	22
14. Repair & ordering spare parts	22
15. Troubleshooting.....	23
16. Warranty Details	25
17. Repair and Refurbished Goods or Parts Notice	26
18. Exploded view	27

1. Introduction

Manufacturer:

Scheppach GmbH
Günzburger Straße 69
D-89335 Ichenhausen

Dear Customer

We hope your new product brings you much enjoyment and success.

Note:

In accordance with the applicable product liability laws, the manufacturer of this product assumes no liability for damage to the product or caused by the product arising from:

- Improper handling
- Non-compliance with the operating manual
- Repairs carried out by third parties, unauthorised specialists
- Installing and replacing non-original spare parts
- Improper use

Note:

The operating manual is part of this product.

It includes important instructions for the safe, proper and economic operation of the product, for avoiding danger, for minimising repair costs and downtimes and for increasing the reliability and extending the service life of the product. In addition to the safety instructions in this operating manual, you must also observe the regulations applicable to the operation of the product in your country.

Familiarise yourself with all operating and safety instructions before using the product. Only operate the product as described and for the specified areas of application. Keep the operating manual in a good place and hand over all documents when passing the product on to third parties.

2. Product description (Fig. 1-11)

1. Carrying handle
2. Blast connection
3. Container
- 3a. Locking mechanisms
4. Base frame
- 4a. Holders

- 4b. Mounting holes
- 5. Castors
- 6. Suction connection
- 6a. Fitting port
- 7. Container cover
- 7a. Holder
- 8. On/off switch
- 9. Filter cage
- 9a. Safety float valve
- 10. Vacuum hose
- 10a. Hose coupling
- 11. Handle
- 12. Suction pipe
- 13. Floor nozzle
- 14. Joint nozzle
- 15. Paper filter bag
- 15a. Sealing ring
- 16. Foam filter
- 17. Textile filter

3. Scope of delivery (Fig. 2)

Item	Quantity	Designation
5.	4 x	Castors
10.	1 x	Vacuum hose
12.	3 x	Suction pipe
13.	1 x	Floor nozzle
14.	1 x	Joint nozzle
15.	1 x	Paper filter bag
16.	1 x	Foam filter
17.	1 x	Textile filter
	1 x	Wet& dry vacuum cleaner
	1 x	Operating manual
	1 x	Warranty card

4. Proper use

The wet and dry vacuum cleaner is suitable for wet and dry vacuuming using the appropriate filter. The product is not intended for vacuuming flammable, explosive or harmful substances.

The product may only be used in the intended manner. Any use beyond this is improper. The user, not the manufacturer, is responsible for damages or injuries of any type resulting from this.

An element of the intended use is also the observance of the safety instructions, as well as the assembly instructions and operating information in the operating manual.

Persons who operate and maintain the product must be familiar with the manual and must be informed about potential dangers.

The liability of the manufacturer and resulting damages are excluded in the event of modifications of the product.

The product may only be operated with original parts and original accessories from the manufacturer.

The safety, operating and maintenance specifications of the manufacturer, as well as the dimensions specified in the technical data, must be observed.

Please note that our products were not designed with the intention of use for commercial or industrial purposes. We assume no guarantee if the product is used in commercial or industrial applications, or for equivalent work.

Explanation of the signal words in the operating manual

DANGER

Signal word to indicate an imminently hazardous situation which, if not avoided, will result in death or serious injury.

WARNING

Signal word to indicate a potentially hazardous situation which, if not avoided, could result in death or serious injury.

CAUTION

Signal word to indicate a potentially hazardous situation which, if not avoided, could result in minor or moderate injury.

ATTENTION

Signal word to indicate a potentially hazardous situation which, if not avoided, could result in product or property damage.

5. Safety instructions

General power tool safety warnings

⚠ WARNING

Read all safety warnings, instructions, illustrations and specifications provided with this power tool.

Failure to follow all instructions listed below may result in electric shock, fire and/or serious injury.

Save all warnings and instructions for future reference.

The term “power tool” in the warnings refers to your mains-operated (corded) power tool or battery-operated (cordless) power tool.

5.1. General safety instructions

- Children, persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge, or persons unfamiliar with the instructions for operating the machine are not allowed to use the machine. Local regulations may restrict the age of the user.
- Children may not play with the Product.
- Cleaning and user maintenance must not be carried out by children.

ATTENTION

The following safety measures for protection against electric shock, and the risk of injury and fire must be observed when using electric tools:

5.2. It will help you avoid accidents and injuries

- Never leave a product ready for operation unattended at the workplace.
- People and animals must not be suctioned with the product.
- Never point the product or nozzles at yourself or others, especially your eyes and ears, during operation. There is a danger of injury.

- Do not suck up any hot, glowing, flammable, explosive or hazardous substances. These include hot ash, petrol, solvents, acids or alkalis. There is a risk of fire and injury.
- Check the product and accessories regularly for damage. Do not use a damaged product or accessories.

5.3. To avoid accidents and injuries due to electric shock

- Switch off the product:
 - when the product is not in use, is being transported or is unattended.
 - when checking the device, it is raining or when removing blockages.
 - when cleaning or performing maintenance or changing accessories.
 - after contact with foreign objects or in the event of abnormal vibrations.
- Do not immerse the product in water and do not operate it in a damp environment.
- Never immerse the product in water or other liquids for cleaning.
- Do not touch the product with damp or wet hands!

5.4. This way, product damage and any resulting personal injury can be avoided

- Ensure that the product is correctly assembled and that the filters are in the correct position.
- Do not work without a filter. The product may become damaged.
- Only use original spare parts and accessories (see “Spare parts/accessories”) supplied and recommended by our Service Centre. Using third-party parts leads to a loss of guarantee claims.
- Only have repairs carried out by authorised service centres.
- Follow the instructions for cleaning and maintaining the product.
- Store the product in a dry place and out of reach of children.

Residual risks

The product has been built according to state-of-the-art and the recognised technical safety rules. However, individual residual risks can arise during operation.

- Health hazard due to electrical power, with the use of improper electrical connection cables.
- Furthermore, despite all precautions having been met, some non-obvious residual risks may still remain.

- Residual risks can be minimised if the "Safety Instructions" and the "Intended Use" together with the operating manual as a whole are observed.
- Prevent the product being unintentionally started up.
- Keep your hands away from the working area when the product is in operation.
- Unintentional starting up of the product.
- Comply with the stipulated maintenance and safety instructions in the operating manual.

⚠ WARNING

This power tool generates an electromagnetic field during operation. This field can impair active or passive medical implants under certain circumstances. In order to prevent the risk of serious or deadly injuries, we recommend that persons with medical implants consult with their physician and the manufacturer of the medical implant prior to operating the power tool.

6. Technical data

Rated voltage	220-240 V~/ 50/60 Hz
Nominal power	1250 W
Protection class	II
Protection category	IPX4
Length of mains connection cable	4 m
Container volume	approx. 20 l
Suction pressure	18.2 kPa
Max. suction power	39 l/s
Hose length	approx. 1.5 m
Weight	approx. 4.5 kg

7. Unpacking

WARNING

**The product and the packaging material are not children's toys!
Do not let children play with plastic bags, films or small parts!
There is a danger of choking or suffocating!**

- Open the packaging and carefully remove the product.
- Remove the packaging material, as well as the packaging and transport safety devices (if present).
- Check whether the scope of delivery is complete.
- Check the product and accessory parts for transport damage. Immediately report any damage to the transport company that delivered the Product. Later claims will not be recognised.
- If possible, keep the packaging until the expiry of the warranty period.
- Familiarise yourself with the product by means of the operating manual before using for the first time.
- With accessories as well as wearing parts and replacement parts use only original parts. Spare parts can be obtained from your specialist dealer.
- When ordering please provide our article number as well as type and year of manufacture for the product.

8. Assembly

WARNING

Danger of injury!

Only insert the mains plug into the socket when the product is ready for use.

- Place the product on a level, even surface.

8.1. Attaching and removing the container cover (7) (Fig. 3)

Removing the container cover:

1. Before removing the container cover (7), remove all nozzles (13/14) and all suction tubes (12) from the holders (7a) on the container (3).

2. Loosen the latches (3a).
3. Lift the container cover (7) from the container (3).

Attaching the container cover:

1. Place the container cover (7) on the container (3).
2. Fasten the container lid (7) with the latches (3a).
Ensure that the latches (3a) latch into the recesses in the container lid (7).

8.2. Fitting the rollers (5) (Fig. 4)

1. Remove the container cover (7) as described in 8.1.
2. Set the container down (3) on a solid surface with the underside facing upwards.
3. Place the rollers (5) into the assembly holes (4b) provided on the base frame (4).
4. Gently press the rollers (5) into the assembly holes (4b).
5. Flip the container (3) and place it on the rollers (5).

8.3. Filter and filter bag

The product has the following filter and filter bag included in the scope of delivery:

Paper filter bag (15)

- Dry vacuuming

Foam filter (16)

- Wet vacuuming

Textile filter (17)

- Vacuuming fine dust

Note:

1. In order to fit/remove the filter and filter bag, remove the container cover (7) as described under 8.1.
2. Always set down the container cover (7) with the top facing downwards.
3. After you have assembled/removed the desired filter and filter bag, reattach the container cover (7) to the container (3).

8.3.1. Fitting/removing the paper filter bag (15) (Fig. 5)**Removing:**

1. Remove the paper filter bag (15) from the bar (6a) on the suction connection (6).

Assembling:

1. Attach the paper filter bag (15) to the bar (6a) on the suction connection (6) inside the container (3).

2. Check that the paper filter bag (15) is installed correctly and the sealing ring (15a) fully envelopes the bar (6a) on the suction connection (6).

8.3.2. Fitting/removing the foam filter (16) (Fig. 6)

Removing:

1. Remove the foam filter (16) from the filter cage (9).

Assembling:

1. Remove the foam filter (16) over the filter cage (9).
2. Check that the foam filter (16) is installed correctly and fully envelopes the filter cage (9).

8.3.3. Assembling/removing the textile filter (17) (Fig. 7)

Removing:

1. Pull the textile filter (17) off the filter cage (9).

Assembling:

1. Pull the textile filter (17) over the filter cage (9).
2. Check that the textile filter (17) is installed correctly and fully envelopes the filter cage (9).

8.4. Connecting the suction hose (10)

8.4.1. Suction function (Fig. 8)

1. Push the hose coupling (10a) fully into the suction connection (6).
2. Turn the hose coupling (10a) clockwise until it fully engages.
3. Check that the suction hose (10) is installed correctly by gently pulling on the hose coupling (10a).

8.4.2. Blast function (Fig. 9)

1. Push the hose coupling (10a) fully into the blowing connection (2).
2. Turn the hose coupling (10a) clockwise until it fully engages.
3. Check that the suction hose (10) is installed correctly by gently pulling on the hose coupling (10a).

8.5. Uncoupling the suction hose (10) (Fig. 8, 9)

Uncouple the suction hose (10) from the suction connection (6) or the blast connection (2):

1. Turn the hose coupling (10a) counter-clockwise.

-
2. Pull the hose coupling (10a) out of the suction connection (2) or the blowing connection (10).

8.6. Attaching the suction pipe (12) (Fig. 10)

1. Attach a suction pipe (12) to the handle (11).
Connect the suction pipe (12) at the desired length.

8.7. Using the various nozzles (13/14) (Fig. 11)

Floor nozzle (13)

- Vacuuming of solid materials and liquids on medium to large surfaces, carpets or floor mats.
- Use the floor nozzle (13) in conjunction with the suction pipes (12).
- If required, it can also be used without the extensions.

Joint nozzle (12)

- Vacuuming of solid materials and liquids in joints, corners, radiators and hard-to-reach areas.

8.7.1. Fitting the nozzle (Fig. 11)

1. Insert the desired nozzle (13/14) into the handle (11) or the suction pipe (12).
2. Remove the nozzle (13/14) by pulling it forwards off the respective suction pipe (12) or off the handle (11).

8.8. Storing the nozzles (13/14), suction pipe (12) and suction hose (10) (Fig. 2, 10, 11)

1. You can store the nozzles (13/14) and the suction pipe (12) in the holders (7a/4a) on the container cover (7) and on the base frame (4).
2. You can store the suction hose (10) in the holders (7a) on the container cover (7).
3. You can store the cable on the holder on the blowing connection (2).

9. Operation

The product is equipped with a stainless steel container. The castors allow the product to be highly manoeuvrable. With wet vacuuming, the suction air flow is switched off by a safety float valve when the container is full. The product also has a blowing function.

Please refer to the following descriptions for the function of the control elements.

ATTENTION

Always make sure the product is fully assembled before commissioning!

⚠ WARNING

Danger of injury!

Only insert the mains plug into the socket when the product is ready for use.

9.1. Switching the product on/off (Fig. 1)

ATTENTION

Do not use without a filter!

Switching on

1. Insert the mains plug into a properly fused mains socket.
2. Switch the product on by setting the on/off switch (8) to the “1” position.

Switching off

1. Switch the product off by setting the on/off switch (8) to the “0” position.

10. Working instructions

10.1. Suction function

⚠ WARNING

Vacuating glowing ash as well as flammable, hazardous substances is prohibited. There is a danger of injury!

ATTENTION

Fine dusts, such as those from cement, soot and plaster, are too fine to be absorbed. There is a risk that it could get into the motor and damage it.

ATTENTION**Do not use without a filter!**

- Place the product on a level, even surface.
 - Do not suck up any hot, glowing, flammable, explosive or hazardous substances. These include hot ash, petrol, solvents, acids or alkalis. There is a risk of fire and injury.
 - If the products heats up switch the product off and pull out the mains plug. Let the product cool down outdoors under supervision.
 - During breaks, the suction tube can be stored in the holder on the container lid.
 - Fill the container no more than half way so that the safety float valve (9a) always remains free (Fig. 7).
1. Attach the hose coupling (10a) to the suction connection (6) (see 8.4.1).
 2. Switch the product on (see 9.1).

10.1.1. Dry vacuuming (Fig. 1, 2)**Note:****Do not use a wet or damp product for dry vacuuming!**

1. Attach the foam filter (16) and the textile filter (17) (see 8.3.).
2. Insert the paper filter bag (15) into the container (3) (see 8.3.1.).
3. Connect the suction coupling (10a) to the suction connection (6) (see 8.4.).
4. Fit the suction pipe (12) to the handle (11) (see 8.6.).
Floor vacuuming:
Connect the suction pipes (12) and one of the nozzles (13/14).
Vacuuming at table height or in confined spaces:
Connect one of the nozzles (13/14) directly (with no suction pipe) or with only one suction pipe (12).
5. Hold the suction pipe (10) handle (11) firmly.
6. Switch on the product (see 9.1.).
7. Vacuum the area to be cleaned.
8. Switch off the product (see 9.1.).

10.1.2. Wet vacuuming (Fig. 1, 2)

Note:

A float integrated in the filter basket ensures that the suction channel is automatically closed as soon as the container has reached its maximum capacity. In this case, the product must be switched off and the container emptied before operation can be continued.

- Empty the container (3) before wet vacuuming (see 12.1.1).
 - The container (3) is not suitable for storing liquids.
Empty the container (3) after wet vacuuming (see 12.1.1).
1. Remove the paper filter bag (15) from the container (3) (see 8.3.1).
 2. Fit the foam filter (16) (see 8.3.2).
 3. Connect the hose coupling (10a) to the suction connection (6) (see 8.4.1).
 4. Attach the suction pipes (12) to the handle (11) (see 8.6.).

Floor vacuuming:

Connect the suction pipes (12) and one of the nozzles (13/14).

Vacuuming at table height or in confined spaces:

Connect one of the nozzles (13/14) directly (with no suction pipe) or with only one suction pipe (12).

5. Hold the suction pipe (10) handle (11) firmly.
6. Switch the product on (see 9.1).
7. Vacuum the area to be cleaned.
8. Switch the product off (see 9.1).
9. Clean the product (see 12.1).

10.2. Blast function

 **WARNING**

Danger of injury!

If you direct the airflow at people, animals or objects, this can cause injury and damage.

- Direct the air flow away from you.
- Never direct the airflow at other people, animals or objects.
- Do not blow away hard objects such as stones or branches.

1. Attach the foam filter (16) and the textile filter (17) (see 8.3).
2. Insert the paper filter bag (15) into the container (3) (see 8.3.1).

3. Fit the hose coupling (10a) to the blowing connection (2) (see 8.4.2). Connect a nozzle (13/14) if required (see 8.7.1).
4. Hold the suction pipe (10) handle (11) firmly.
5. Switch on the product (see 9.1).
6. Blow off a surface or objects.
7. Switch off the product (see 9.1).
8. Connect the suction hose to the suction connection (6) (see 8.4.1).

11. Electrical connection

The electrical motor installed is connected and ready for operation. The connection complies with the applicable VDE and DIN provisions. The customer's mains connection as well as the extension cable used must also comply with these regulations.

11.1. Damaged electrical connection cables

The insulation on electrical connection cables is often damaged.

This may have the following causes:

- Pressure points, where connection cables are passed through windows or doors,
- Kinks where the connection cable has been improperly fastened or routed,
- Places where the connection cables have been cut due to being driven over,
- Insulation damage due to being ripped out of the wall socket,
- Cracks due to the insulation ageing.

Such damaged electrical connection cables must not be used and are life-threatening due to the insulation damage.

Check the electrical connection cables for damage regularly. Ensure that the connection cables are disconnected from electrical power when checking for damage.

Electrical connection cables must comply with the applicable VDE and DIN provisions. Only use connection cables of the same designation.

The printing of the type designation on the connection cable is mandatory.

Safety information for replacing damaged or defective mains connection cables

Connection type Y

If it is necessary to replace the mains connection cable, this must be done by the manufacturer or their representative to avoid safety hazards.

11.2. Important information

In the event of overloading, the motor will switch itself off. After a cool-down period (time varies) the motor can be switched back on again.

11.3. AC motor

Connections and repair work on the electrical equipment may only be carried out by electricians.

- The mains voltage must be 220 V - 240V~.
- Extension cables up to 25 m long must have a cross-section of 1.5 mm².

12. Cleaning and maintenance

WARNING

Have maintenance and repair tasks that are not described in this operating manual, carried out by a specialist workshop. Use only original spare parts.

There is a risk of accident! Always carry out maintenance and cleaning work with the motor switched off and the mains plug disconnected. There is a danger of injury! Let the Product cool down before all maintenance and cleaning tasks. Elements of the engine are hot. There is a danger of injury and burning!

The product can start unexpectedly and cause injuries.

- Switch off the motor before carrying out any cleaning or maintenance work.
- Allow the motor to cool down.
- Pull out the mains plug!

12.1. Cleaning

1. Never immerse the product in water or other liquids for cleaning.
2. Do not splash the product with water.
3. Keep protective devices, air vents and the motor housing as free of dust and dirt as possible. Rub the product clean with a clean cloth* or blow it off with compressed air* at low pressure. We recommend that you clean the product directly after every use.

4. Ventilation openings must always be free.
5. Do not use any cleaning products or solvents; they could attack the plastic parts of the product. Make sure that no water can penetrate the product interior.

* = may not be included in the scope of delivery!

12.1.1. Emptying the container (3) (Fig. 1)

WARNING

Empty and clean the product before and after use to avoid the accumulation of materials that could pose a fire risk in the product.

1. Remove the container lid (7) from the container (3) as described in 8.1.
2. Empty the container (3).

12.1.2. Cleaning the filter (16/17) (Fig. 2, 6, 7, 10)

Clean the filter (16/17) if suction power decreases.

1. Remove all nozzles (13/14) and suction pipes (12) from the holders (4a/7a).
2. Remove the container cover (7) as described in 8.1.
3. Flip the container cover (7).
4. Remove the filter (16/17) from the filter cage (9).
5. Remove the dust from the filter (16/17) by shaking it out or washing it out if necessary.
6. Allow the filter (16/17) to air dry before attaching and using it again.
7. Reattach the filter (16/17) to the filter cage (9).
8. Close the container (3) with the container cover (7).

12.2. Maintenance

1. Check the product for obvious defects such as loose, worn or damaged parts before each use.
2. Check the covers and protective devices for damage and correct seating. Replace them if necessary.

12.2.1. Replacing the filter and filter bag (Fig. 1, 2, 10)

1. Remove all nozzles (13/14) and suction pipes (12) from the holders (4a/7a).
2. Remove the container cover (7) as described in 8.1.
3. Flip the container cover (7).

4. Pull the filter (16/17) off the filter basket (9) or remove the paper filter bag (15) from the fitting port (6a).
5. Attach the new filter (16/17) to the filter basket (9) as described in 8.3.2. or 8.3.3.
6. To replace the paper filter bag (15), proceed as described in 8.3.1.
7. Close the container (3) again with the container cover (7).

13. Storage and transport

13.1. Storage

- Clean and check the product for damage.

Store the product and its accessories in a dark, dry and frost-free place that is inaccessible to children.

The optimum storage temperature is between 5°C and 30°C.

Store the product in its original packaging.

Cover the product to protect it from dust or moisture. Store the operating manual with the product.

13.2. Transport

1. To transport the product, disconnect the it from the power supply and set it up in the new position you want to use it in.
2. The product may only be lifted or transported by the carrying handle.
3. Lift the product for transport over stairs or obstacles.
4. The product must be secured against tipping and slipping during transport in vehicles in order to prevent damage and injuries.

14. Repair & ordering spare parts

After repairs or maintenance, make sure that all safety-related parts are installed and are in perfect condition. All parts which may cause injury must be kept where they are inaccessible to children or others.

ATTENTION

Such work should be performed by a customer service centre or an authorised specialists. The same applies to accessory parts.

Connections and repairs

Connections and repair work on the electrical equipment may only be carried out by electricians.

14.1. Ordering spare parts

Please provide the following information when ordering spare parts:

- Model designation
- Item number
- Type plate data

15. Troubleshooting

The following table shows fault symptoms and describes remedial measures in the event of your product failing to work properly. If you cannot localise and rectify the problem with this, please contact your service workshop.

Fault	Possible cause	Remedy
Product does not run.	Product switched off. On/off switch switched off.	Switch the product on with the On/Off switch.
	Damaged mains connection cable.	Switch the product off and disconnect from the mains. Check for mains connection cable for damage. If necessary, have the mains connection cable replaced by an authorised specialist.
	On/off switch defective.	Please contact our service department.
	Motor defective.	
	Faulty power supply.	Check the electrical system for compliance with the specifications on the type plate.

Fault	Possible cause	Remedy
Product works with interruptions.	Internal loose contact.	Please contact our service department.
	On/off switch defective.	
	Container not closed.	Close the container.
	The container is full.	Empty the container.
	The airway is blocked.	Check the following parts for blockages and remove the blockages: <ul style="list-style-type: none"> • Container • Vacuum hose • Suction pipe
	The foam filter or the textile filter is blocked.	Clean the foam filter or the textile filter.
The suction capacity is also reduced after cleaning the foam filter or the textile filter.	The foam filter or the textile filter is damaged.	Replace the foam filter or the textile filter.
The product is overheated.	The foam filter or the textile filter is blocked.	Clean the foam filter or the textile filter.
	The paper filter bag is full.	Replace the paper filter bag.
Dust escapes from the product.	The container cover has not been installed correctly.	Attach the container cover correctly.
Material sucked in is blown out again at the container cover.	The foam filter or the textile filter is damaged.	Replace the foam filter or the textile filter.
	There is no filter present.	Insert a filter.

16. Warranty Details



FERREX[®]

Wet / dry vacuum cleaner

Warranty Details

**REGISTER YOUR PURCHASE AT www.aldi.com.au/en/about-aldi/product-registration/
TO KEEP UP-TO-DATE WITH IMPORTANT PRODUCT INFORMATION**

The product is guaranteed to be free from defects in workmanship and parts for a period of 60 months (dependant on product) from the date of purchase. Defects that occur within this warranty period, under normal use and care, will be repaired, replaced or refunded at our discretion. The benefits conferred by this warranty are in addition to all rights and remedies in respect of the product that the consumer has under the Competition and Consumer Act 2010 and similar state and territory laws.

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

AFTER SALES SUPPORT

1300 855 831

support@scheppach.com.au



17. Repair and Refurbished Goods or Parts Notice



FERREX®

Wet / dry vacuum cleaner

Repair and Refurbished Goods or Parts Notice

**REGISTER YOUR PURCHASE AT www.aldi.com.au/en/about-aldi/product-registration/
TO KEEP UP-TO-DATE WITH IMPORTANT PRODUCT INFORMATION**

Unfortunately, from time to time, faulty products are manufactured which need to be returned to the Supplier for repair.

Please be aware that if your product is capable of retaining user-generated data (such as files stored on a computer hard drive, telephone numbers stored on a mobile telephone, songs stored on a portable media player, games saved on a games console or files stored on a USB memory stick) during the process of repair, some or all of your stored data may be lost.

We recommend you save this data elsewhere prior to sending the product for repair.

You should also be aware that rather than repairing goods, we may replace them with refurbished goods of the same type or use refurbished parts in the repair process.

Please be assured though, refurbished parts or replacements are only used where they meet ALDI's stringent quality specifications.

If at any time you feel your repair is being handled unsatisfactorily, you may escalate your complaint. Please telephone us on 1300 855 831 or write to us at:

RossMac Pty. Ltd.
Unit 6, 4 Ovata Drive, Tullamarine, Victoria, 3043, Australia
1300 855 831
support@scheppach.com.au


Opening hours:
Monday - Friday 8:00am-6:00pm

AFTER SALES SUPPORT

1300 855 831

support@scheppach.com.au



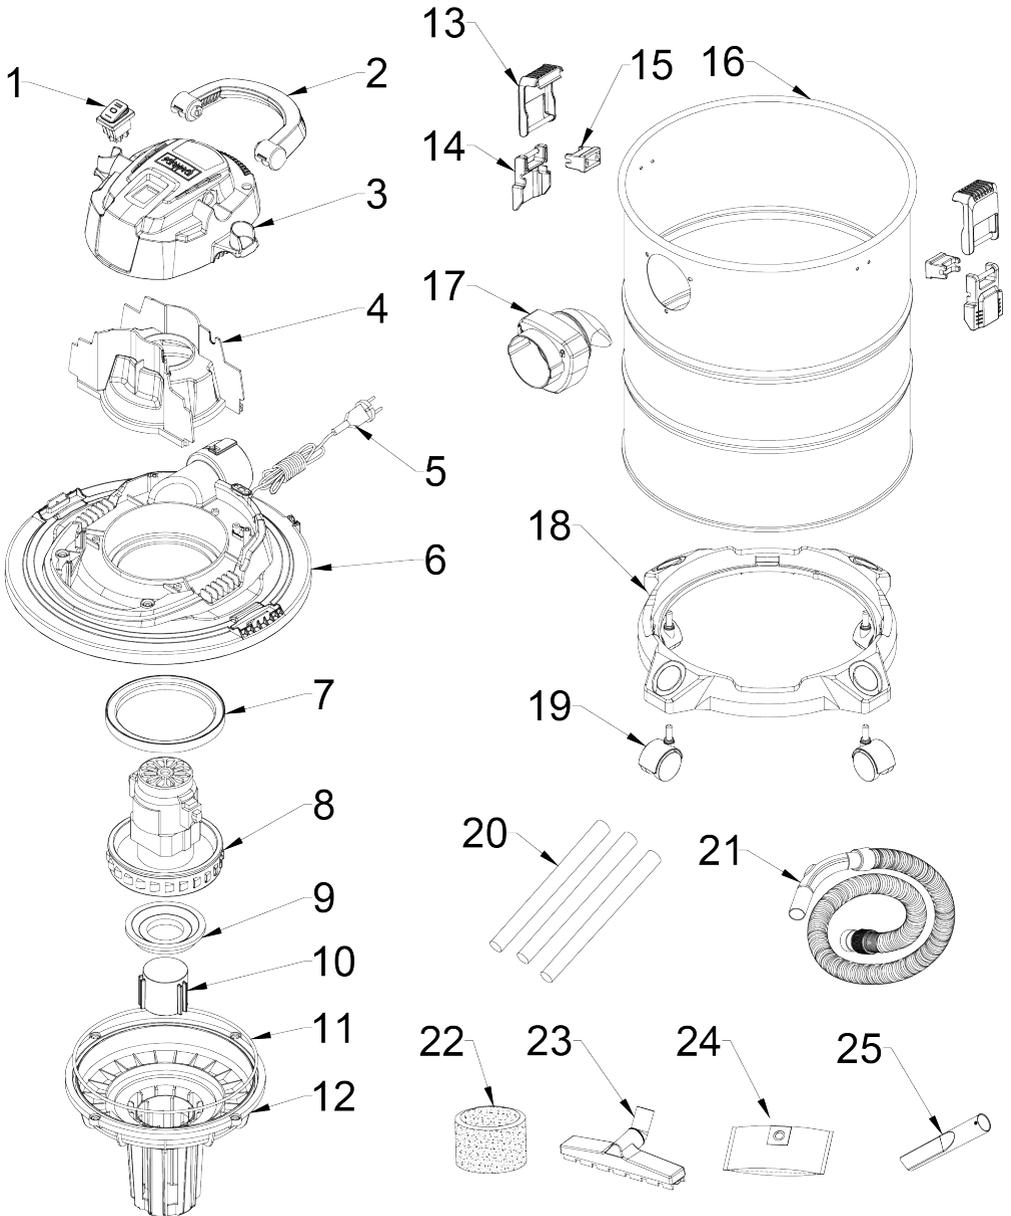

ALDI GUARANTEES THAT OUR EXCLUSIVE BRAND PRODUCTS ARE DEVELOPED TO OUR STRINGENT QUALITY SPECIFICATIONS. IF YOU ARE NOT ENTIRELY SATISFIED WITH THIS PRODUCT, PLEASE RETURN IT TO THE NEAREST ALDI STORE WITHIN 60 DAYS FROM THE DATE OF PURCHASE, FOR A FULL REFUND OR REPLACEMENT, OR TAKE ADVANTAGE OF OUR AFTER SALES SUPPORT BY CALLING THE SUPPLIER'S CUSTOMER SERVICE HOTLINE.

AU

Made in China

Ferrex® is a registered trademark of ALDI Stores

DISTRIBUTED BY:

ALDI STORES

1 Sargents Road

Minchinbury NSW 2770

www.aldi.com.au

Customer service

W²



AU 1300 855 831

720353



support@schepach.com.au

Model:

F-WDV20

06/2025

3

YEAR WARRANTY